




YAMAHA MT-09



- **PACKING LIST:**
- **1X DOWN PIPE SET**
- **2X CLAMPS**
- **1X SILENCER AND STRAP WITH RUBBER INSERT**
- **1X MOUNTING BRACKET**
- **3X CYLINDER PORT GASKETS**
- **1X M8 CAP SCREW**
- **2X M8 NYLOC NUTS**
- **3X M8 WASHERS**
- **1X TUBE OF SILICON SEALANT**

- **Fitting Instructions**

- We advise that this product is fitted by an experienced motorcycle mechanic.
- Please check packing list before you start.
- Secure motorcycle on level ground using a paddock stand. Recommended!
- Remove existing exhaust.
- Clean cylinder head ports of old gasket material, dirt and carbon deposits.
- Fit the new cylinder port gaskets and the header pipes finger tight.

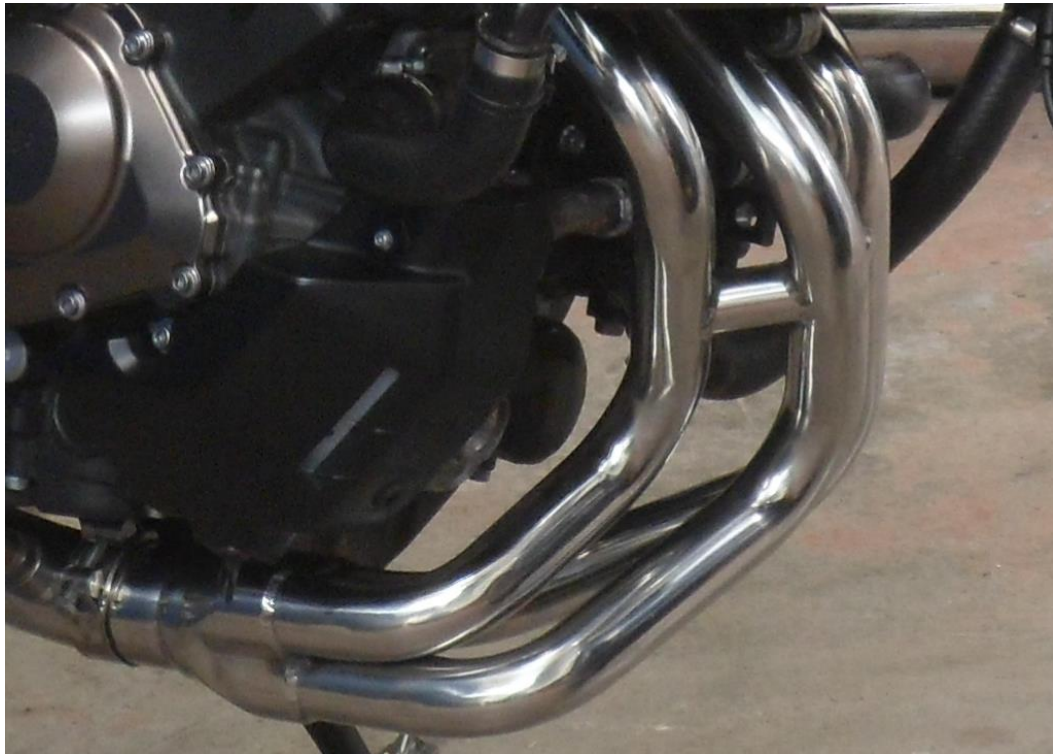

- **Fit the clamp and insert the link pipe on to the collector.**



- **Fit the lambda sensor (if used).**
- **Fit the mounting bracket to the frame behind footrest hanger.**



- **Fit the silencer with clamp on to the link pipe and fit the strap around the silencer and to the bracket.**



- **Starting from the front, working rearwards tighten all clamps and fasteners.**
- **Start the engine and check for leaks.**
- **After your first ride out, check all fasteners for tightness, especially the baffle bolt.**