

YAMAHA YZF R3




- PACKING LIST:
- 1X DOWN PIPE SET AND COLLECTOR
- 2X CLAMPS
- 1X SILENCER AND STRAP WITH RUBBER INSERT
- 2X CYLINDER PORT GASKETS
- 2X COLLECTOR SPRINGS
- 1X TUBE OF SILICON SEALANT

- Fitting Instructions
- We advise that this product is fitted by an experienced motorcycle mechanic.
- Please check packing list before you start.
- Secure motorcycle on level ground using a paddock stand. Recommended!
- Remove existing exhaust.
- Clean cylinder head ports of old gasket material, dirt and carbon deposits.
- Fit the new cylinder port gaskets and the header pipes finger tight.



- Attach the collector.
- Fit the lambda sensor (if used).
- Fit the clamp and insert the link pipe into the collector.

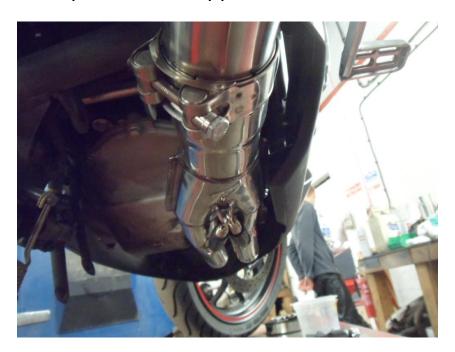

• Fit silencer with clamp on to the link pipe and fit the strap around the silencer and to the frame.



- Starting from the front, working rearwards tighten all clamps and fasteners.
- Start the engine and check for leaks.
- After your first ride out, check all fasteners for tightness, especially the baffle bolt.