

Z1000SX LINK PIPES



Packing List:

- 2X SILENCERS OF CHOICE AND STRAPS
- 2X LINK PIPES
- 1X EXHAUST SHIELD SPECIAL CLAMP
- MOUNTING HARDWARE AND SPACERS
- 2X GRAPHITE GASKETS

- Fitting Instructions.
- We strongly advise that this product is fitted by an experienced motorcycle mechanic.
- Please check packing list before you start.
- Secure motorcycle on level ground using paddock stand. Recommended!
- Remove standard exhausts.
- Clean collector pipes of old gasket material, dirt and carbon deposits.
- Remove original right hand collector clamp and keep safe.
- Flatten the small tang on the outlet and fit the special clamp as shown below.




- Insert the <u>longest</u> link pipe into R.H collector with new graphite gasket.
- Nip up bolt, not too tight for now just to support the pipe.

• Remove OEM rubber bushes from the frame.



• Replace with spacers as shown.

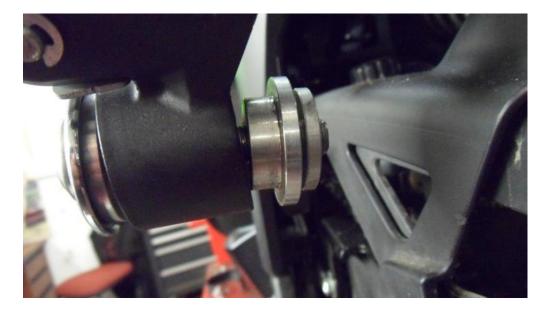

• Fit the bracket to the spacers.



• Fit the strap around the silencer and to the bracket.



Starting from the front working rearwards tighten all clamps and fasteners. Start engine and check for leaks.

Replace panels, seats etc.

After your first ride out, check all fasteners for tightness, especially the baffle bolts.