

## **GSXR 600/750 SRAD LINK PIPE**



1.


**PACKING LIST:** 

1X LINKPIPE.

2X CLAMPS.

1X SILENCER OF CHOICE AND STRAP WITH RUBBER INSERT.

- Fitting Instructions
- We advise that this product is fitted by an experienced motorcycle mechanic.
- Please check packing list before you start.
- Secure motorcycle on level ground using a paddock stand. Recommended!
- Remove standard silencer.
- Cut the OEM pipe 50mm from the welding bead.

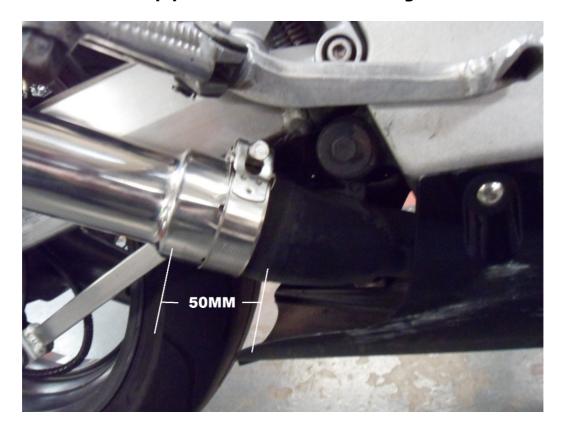

3.

- Fit the clamp and insert the pipe on to the collector.
- Fit the silencer with clamp on to the link pipe and fit the strap around the silencer and to the footrest bracket.

4.

- Starting from the front, working rearwards tighten all clamps and fasteners.
- Start the engine and check for leaks.
- After your first ride out, check all fasteners for tightness, especially the baffle bolt.