



## YAMAHA MT-07



**1.**

**PACKING LIST:**

**2X DOWNPIPES**

**2X CYLINDER PORT GASKETS**

**1X COLLECTOR**

**2X COLLECTOR SPRINGS**

**1X LINKPIPE**

**2X CLAMPS**

**1X SILENCER OF CHOICE AND STRAP**

**1X MOUNTING BRACKET**

**2X M8 x 45MM CAP SCREWS**


**2X M8 WASHERS**

**1X M8 NYLOC NUT**

**2.**

- **Fitting Instructions**

- We advise that this product is fitted by an experienced motorcycle mechanic.
- Please check packing list before you start.
- Secure motorcycle on level ground using a paddock stand. Recommended!
- Remove standard exhaust.
- Clean cylinder head ports of old gasket material, dirt and carbon deposits.
- Fit the new cylinder port gaskets and the header pipes finger tight.
- Attach the collector and link pipe, checking for rear brake pedal clearance.
- Remove the pillion footrest pin and fit the mounting bracket using the cap screw.

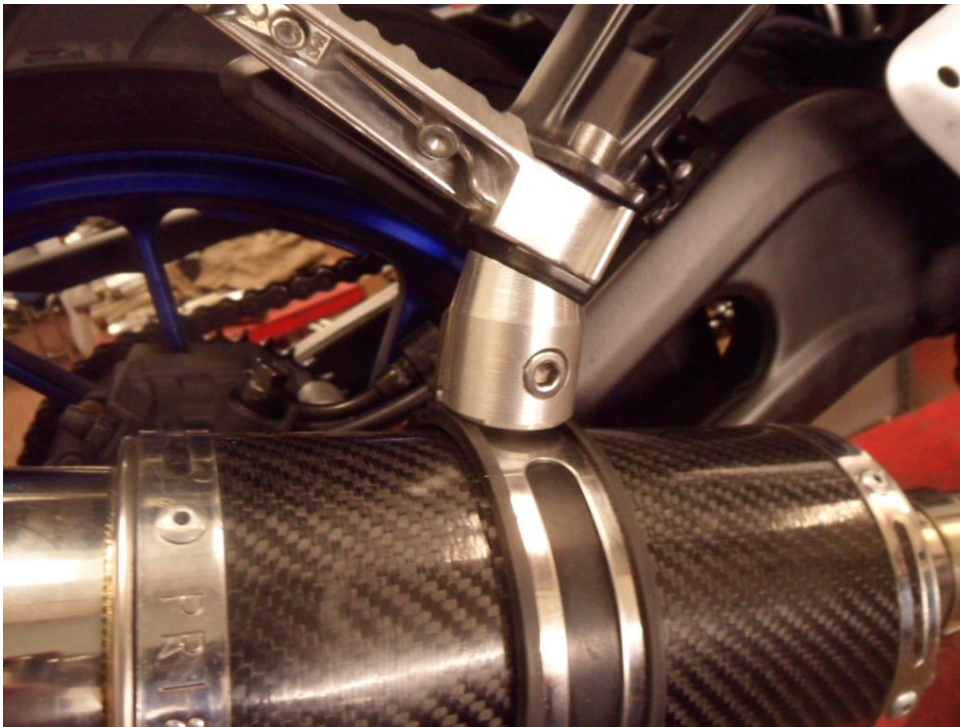

- Fit silencer with clamp on to the link pipe and fit the strap around the silencer and to the bracket.

### **3.**

- **Re- check rear brake pedal clearance.**
- **Starting from the front, working rearwards tighten all clamps and fasteners.**
- **Fit the collector springs.**
- **Start the engine and check for leaks.**
- **After your first ride out, check all fasteners for tightness, especially the baffle bolt.**