


## **KAWASAKI Z800e SILENCER KIT**



- PACKING LIST:
- 1X LINKPIPE
- 2X CLAMPS
- 1X SILENCER AND STRAP WITH RUBBER INSERT
- 1X TUBE OF SILLICON SEALANT

- Fitting Instructions
- We advise that this product is fitted by an experienced motorcycle mechanic.
- Please check packing list before you start.
- Secure motorcycle on level ground using a paddock stand. Recommended!
- Remove seat and side panel.
- Disconnect exhaust valve cables from the servo.

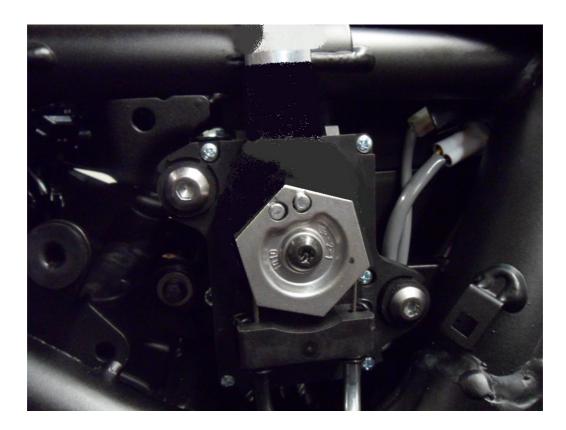

- Remove standard silencer.
- Clean the collector pipe of old gasket material, dirt and carbon deposits.

• Smear a small amount silicon sealant on the inside of the link pipe and insert onto the collector.



• Fit the silencer with clamp on to the link pipe and fit the strap around the silencer and to the footrest bracket.



- Check rear brake pedal clearance.
- Starting from the front working rearwards, tighten all clamps and fasteners.
- Start the engine and check for leaks.
- After your first ride out, check all fasteners for tightness, especially the baffle bolt.