



HONDA XL600V



- **PACKING LIST:**
- **1X LINK PIPE**
- **1X CARBON GASKET**
- **2X CLAMPS**
- **1X SILENCER AND STRAP WITH RUBBER INSERT**
- **1X MOUNTING BRACKET**
- **1X SHORT SPACER**
- **1X LONG SPACER**
- **1X M8x 40MM CAP SCREW**
- **1X M8 NYLOC NUT**
- **2X M8 WASHERS**
- **1X TUBE OF SILICON SEALANT**

- **Fitting Instructions**


- **We advise that this product is fitted by an experienced motorcycle mechanic.**
- **Please check packing list before you start.**
- **Secure motorcycle on level ground using a paddock stand. Recommended!**
- **Remove standard silencer.**
- **Clean the collector pipe of old gasket material, dirt and carbon deposits.**
- **Fit the clamp and insert the link pipe on to the collector.**
- **Fit the mounting bracket on to the frame.**



- **Fit the silencer with clamp on to the link pipe and fit the strap around the silencer and to the bracket with the short spacer.**



- **Re-fit footrest bracket bolt using the long spacer.**

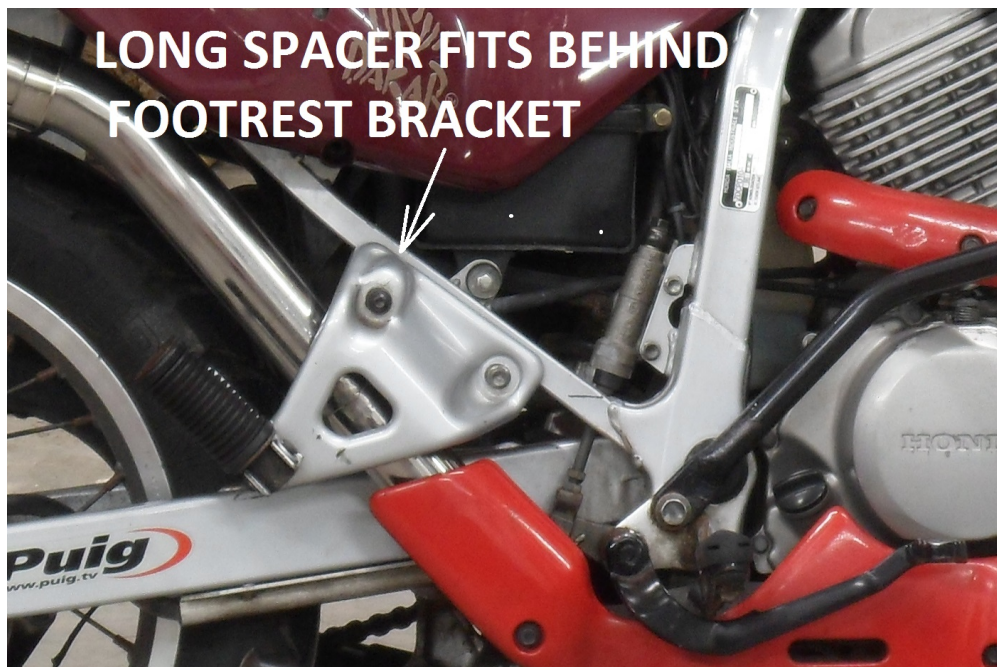

- **Starting from the front, working rearwards tighten all clamps and fasteners.**
- **Start the engine and check for leaks.**

- **After your first ride out, check all fasteners for tightness, especially the baffle bolt.**