



## GS1000



- **PACKING LIST:**
- **1X DOWN PIPE AND COLLECTOR SET**
- **4X CYLINDER PORT GASKETS**
- **1X SILENCER**
- **1X SILENCER MOUNTING BRACKET**
- **4X COLLECTOR SPRINGS**
- **1X TUBE OF SILICON SEALANT**


- **IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY.**
- **THE FITTING PROCEDURE IS THE SAME.**

- **Fitting Instructions**

- We advise that this product is fitted by an experienced motorcycle mechanic.
- Please check packing list before you start.
- Secure motorcycle on level ground using a paddock stand. Recommended!
- Remove existing exhaust system.
- Clean the cylinder ports of old gasket material, dirt and carbon deposits.
- Insert new port gaskets, holding in place with a smear of silicon.
- Fit the outer 1 and 4 downpipes loosely and attach the collector.



- Fit the number 3 downpipe.

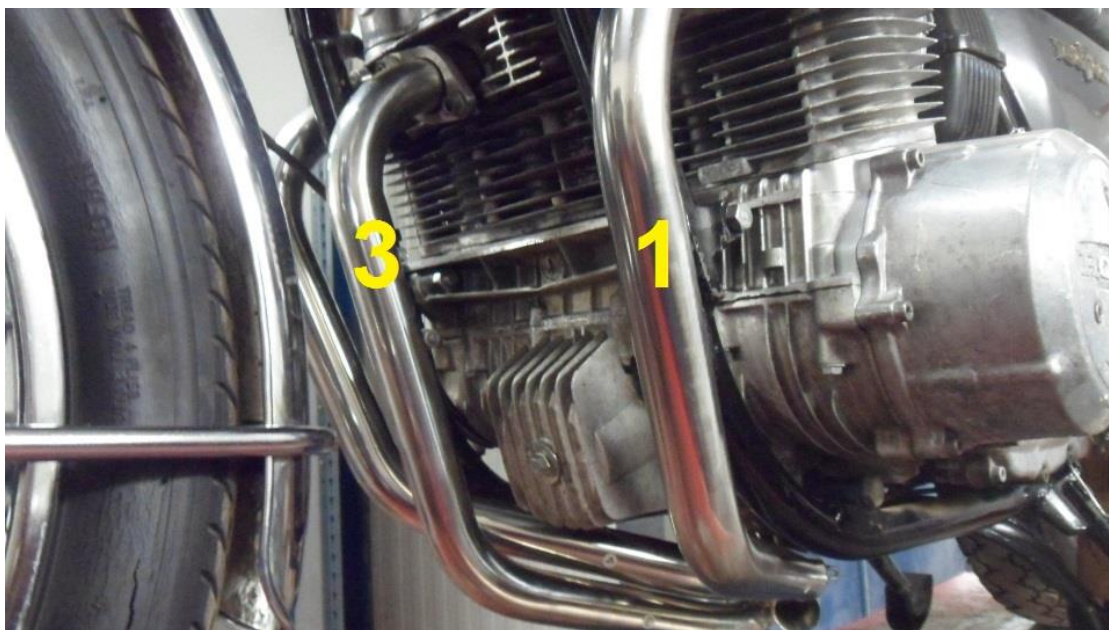

- Followed by the number 2 downpipe.





- **Fit the bracket to the silencer.**



- **Attach the silencer to the collector and fit the bracket to the frame.**



- **Starting from the front, working rearwards tighten all clamps and fasteners.**
- **Lastly, fit the collector springs.**
- **Start the engine and check for leaks.**
- **After your first ride out, check all fasteners for tightness, especially the baffle bolt.**